


Part Number	Length	Frequency Range	Insertion Loss	VSWR	Impedance
1.0-JJ1	15.8 mm	110 GHz	$\leq 0.5\text{dB @ 110 GHz}$	$\text{VSWR} \leq 1.5 @ 110 \text{ GHz}$	$50 \Omega$

Electrical, Mechanical and Environmental Characteristics:

- (1) Voltage Withstand:  $\geq 300 \text{ V}$ ;
- (2) Insulation Resistance:  $\geq 5000 \text{ M}\Omega$ ;
- (3) Durability:  $\geq 500 \text{ Times}$ ;
- (4) Operating Temperature Range:  $+15^\circ\text{C} \sim +35^\circ\text{C}$ .

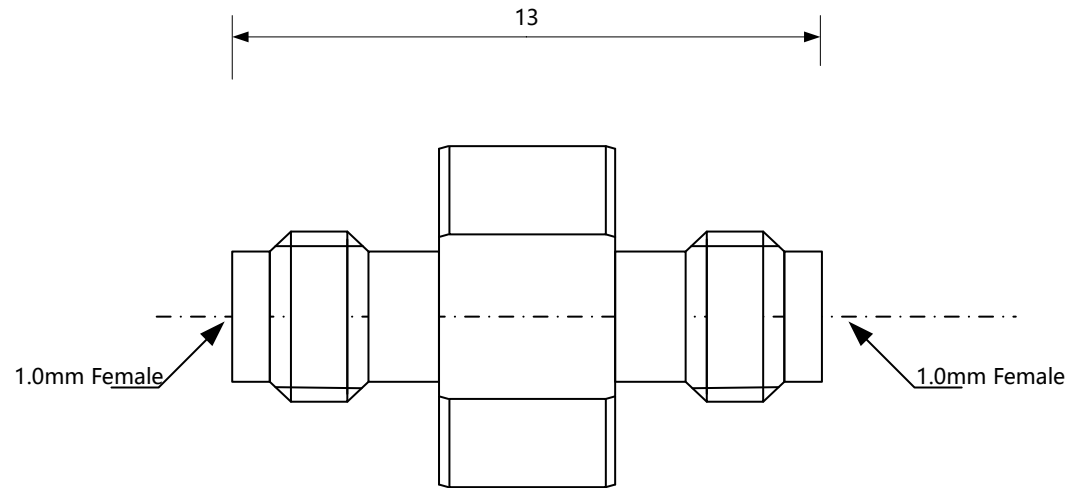

Part Number	Length	Frequency Range	Insertion Loss	VSWR	Impedance
1.0-KK1	13 mm	110 GHz	≤0.5dB @ 110 GHz	VSWR≤1.6 @ 110 GHz	50 Ω

Electrical, Mechanical and Environmental Characteristics:

- (1) Voltage Withstand: ≥300 V;
- (2) Insulation Resistance: ≥5000 MΩ;
- (3) Durability: ≥500 Times;
- (4) Operating Temperature Range: +15°C ~ +35°C.